


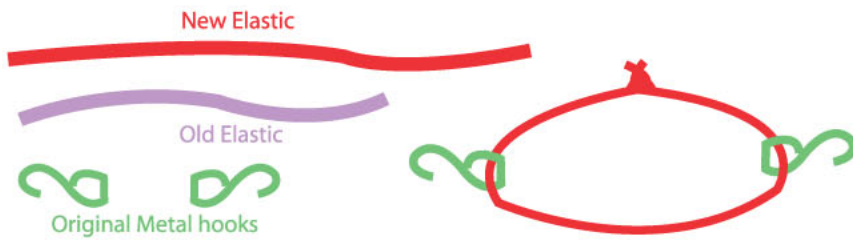




# Re-stringing Action Man Arms using elastic.



Lee Selvester

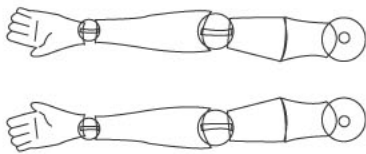

1 Remove old elastic and cut it in half to make one strip. Measure new elastic a bit longer than old piece (to allow for tying knots).



2 Thread the two original hooks onto the new piece of elastic and tie into loop, as above.

3 Hook one hook onto an arm (see diagram) and feed elastic through arm hole, make sure you have correct arm on correct side ;o)

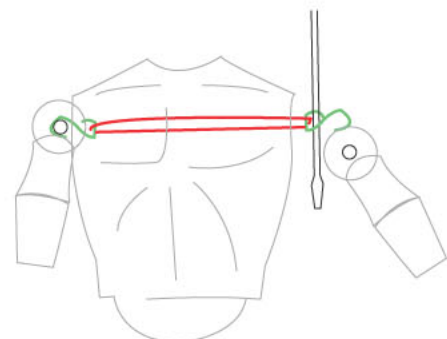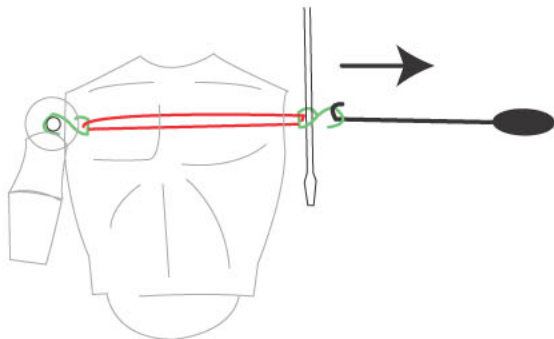

4 Using hook (I use hair bin with end bent) pull other hook through hole. BE CAREFUL. Push screwdriver through bottom part of hook to prevent it from shooting back through body. Be careful not to scratch body.

5 With screwdriver still in place attach other arm to hook. Remove screwdriver and arms should be nice and tight. Elastic length is a trial and error process I'm afraid because it depends on the knots you use and thickness of elastic.

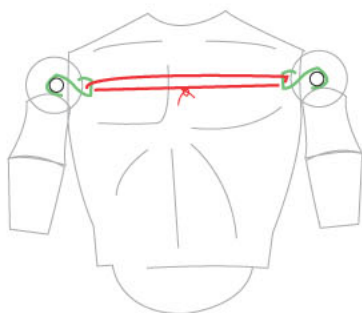

Tips:

I don't use flat elastic, I prefer the cord type as it ties easier and doesn't screw up as much.